

Numbra TY1
Teruhiro Yanagihara
2026

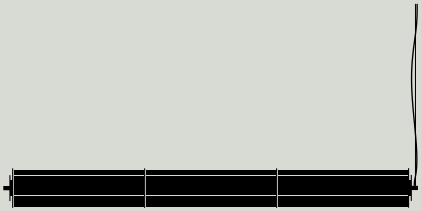

Please read these instructions carefully and retain them for future reference to ensure the product is used correctly. For your own safety, please study each step of this instruction manual first. &Tradition is not responsible for any faults or damage caused by not following these instructions correctly. Do not modify this product in any way.
If you have any questions or comments, please do not hesitate to contact us by mail on: info@andtradition.com

Numbra TY1
Teruhiro Yanagihara
2026

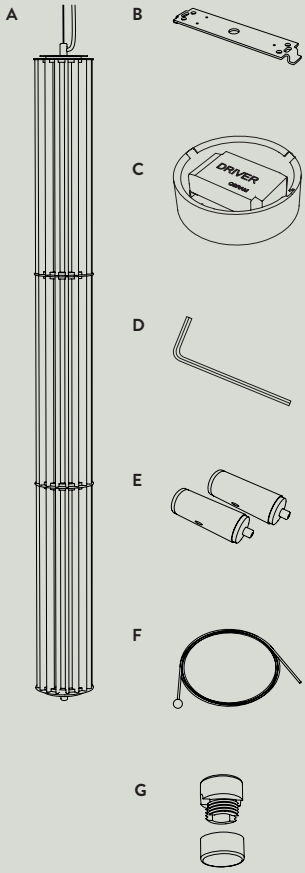

Safety precautions

Due to the possibility of personal injury or property damage it is important to follow the following-

Installation to be conducted by a professionally qualified electrician/contractor.
Minimum two or more people required for installation.
Ensure your ceiling can hold the weight of 5 kg.
Screws and plugs for fixing the product to the ceiling are not included. Every ceiling will require different types of screws and plugs so please ensure to select the appropriate type for your ceiling material.
Turn off main power supply before installation.
Keep product and plastic packaging out of reach of children
The lamp is intended for indoor use only.
If the external flexible cable or cord is damaged, it shall only be replaced by the manufacturer, their service agent, or a similarly skilled person.
The light source shall only be replaced by the manufacturer, their service agent, or a similarly skilled person.
The servicing of the controlgear in this luminaire should only be undertaken by the manufacturer or their service agent or a similarly skilled person.
The controlgear of this luminaire is a non-user serviceable component, access to the controlgear is only to be undertaken by the manufacturer or their service agent or a similarly skilled person.

Contents

A Lamp
B Mounting bracket
C Canopy incl. driver
D Allen key
E Wire suspension
F Wire
G Cable holder

Tools needed

- Screwdriver
- Wire cutter


Cleaning instructions

Wipe surface of the lamp with a soft, damp sponge or cloth wrung in warm water. Do not use strong cleaning agents such as white spirit, turpentine, household glass cleaner or cellulose thinners. Never any abrasive cleaning tools such as steel wool, scouring sponges or stiff brushes as this will damage the surface of the lamp.

10/26
For indoor use only
Built-in LED controlgrar
This product contains a light source rated energy calss F


Step 1

Ensure that the power supply is switched off. Remove the driver from the canopy by loosening and removing the two corner screws.

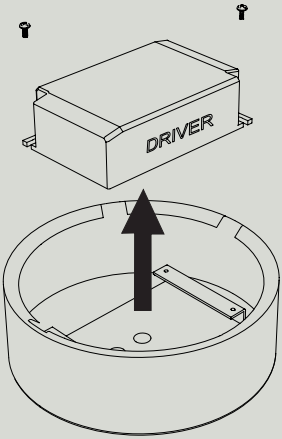

Step 2

Adjust the cable length by releasing the screws from cord anchorage, adjust cable length, then fix the cord anchorage again by tighting the screw. Place the driver back into the canopy and secure it by tightening the two corner screws.

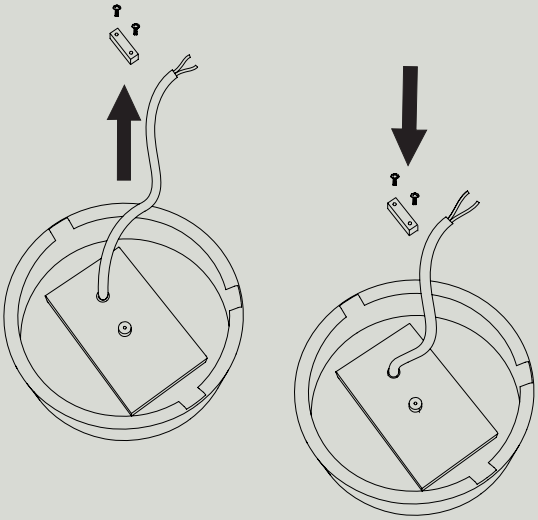


Step 3

Connect the power supply cable to the Class II terminal (**1**).


Connect the ⏚ cable to the single push-in wire connector (**2**).

Connect the lamp cable to the double push-in wire connector (**3**).

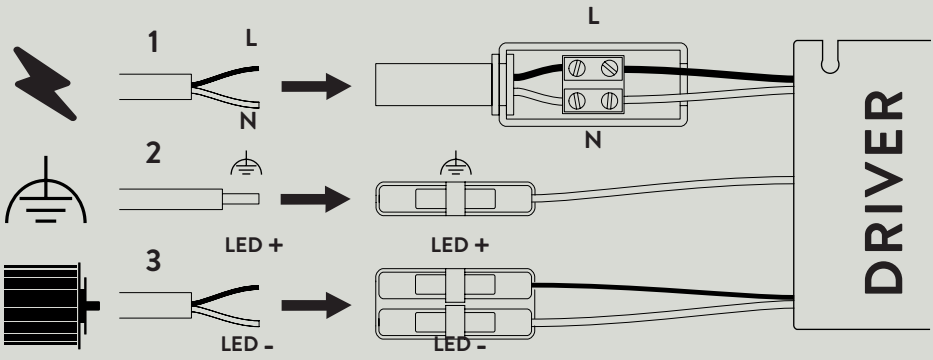


Note

Horizontal installation, proceed to step 9-12
Vertical installation, continue with Step 4-8

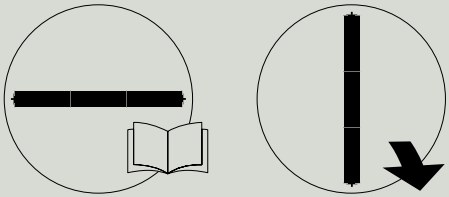


Step 4

One end of the lamp can be suspended directly from the canopy (Option **A**) or positioned to one side using the cable holder and wire suspension (Option **B**).

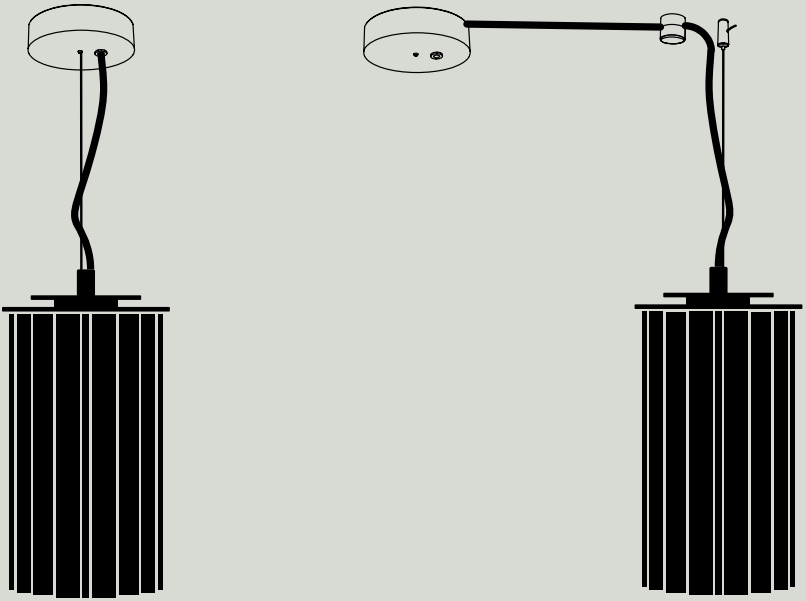


Step 5


Install the ceiling bracket using screws. Attach the canopy by placing it over the bracket and rotating it into position.

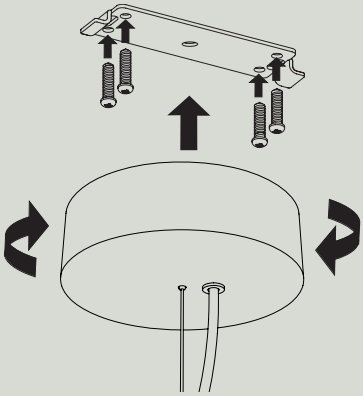

For option **B**, pull the metal wire from the canopy.

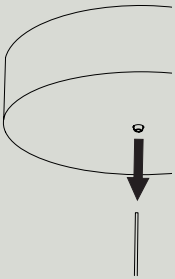


Install the cable holder and wire suspension in the desired position.

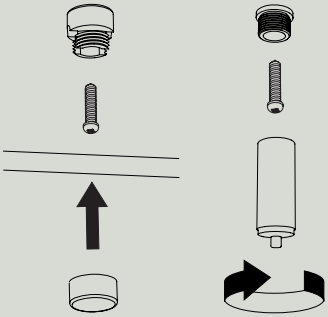


Feed the cable from the canopy through the cable holder and secure the wire in the wire suspension.

Ensure that the power cable does not bear any weight after installation.

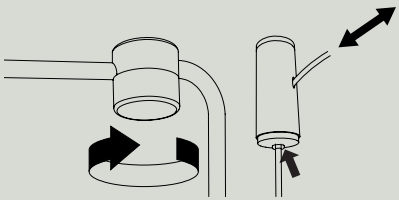


Step 6

Loosen the small grub screw using the supplied Allen key to remove the small cylinder at the bottom of the lamp.

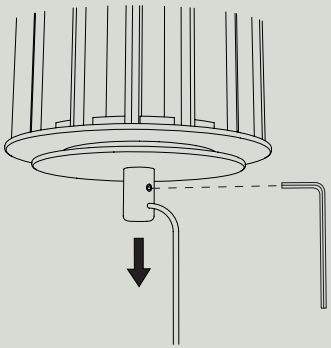


Step 7

Pull the metal wire out through the large opening. The wire is not used for vertical installation.

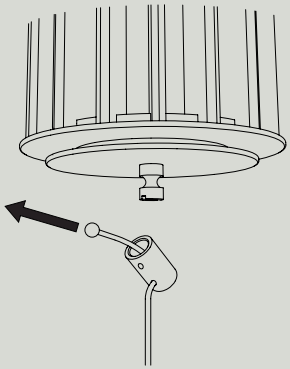


Step 8

Reattach the small cylinder to the product and secure it using the grub screw and Allen key.

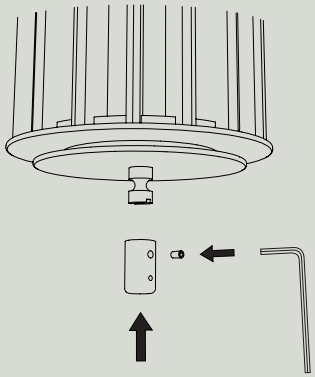


The lamp is now fully installed.

The power supply can be switched on.




Step 9

One end of the lamp can be suspended directly from the canopy (Option **A**) or positioned to one side using the cable holder and wire suspension (Option **B**).

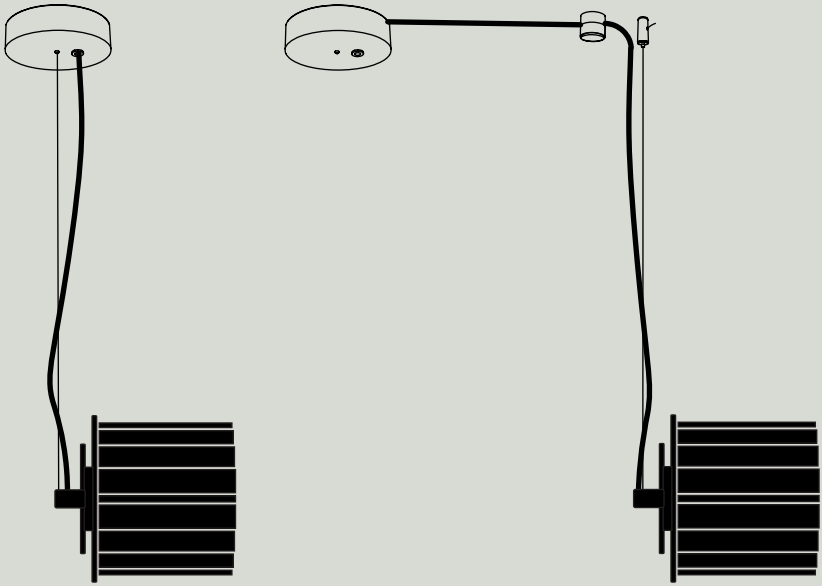


Step 10

Install the ceiling bracket using screws. Attach the canopy by placing it over the bracket and rotating it into position.

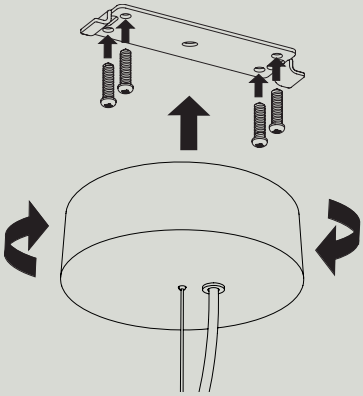


Note

For option **B**, pull the metal wire from the canopy.

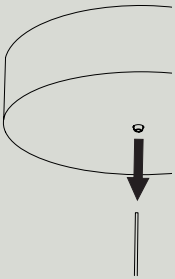


Install the cable holder and wire suspension in the desired position.

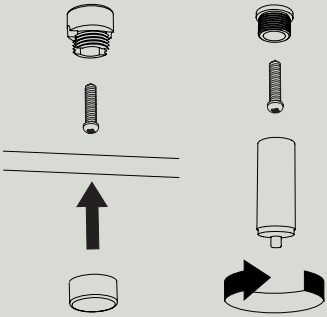


Feed the power cable from the canopy through the cable holder and secure the wire in the wire suspension.

Ensure that the power cable does not bear any weight after installation.

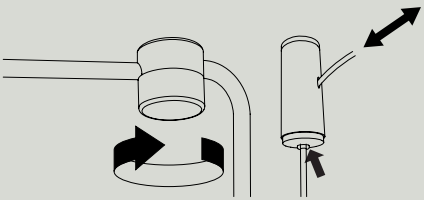

Step 11

Install the second wire suspension. The distance between the canopy and the wire suspension should be 126 cm

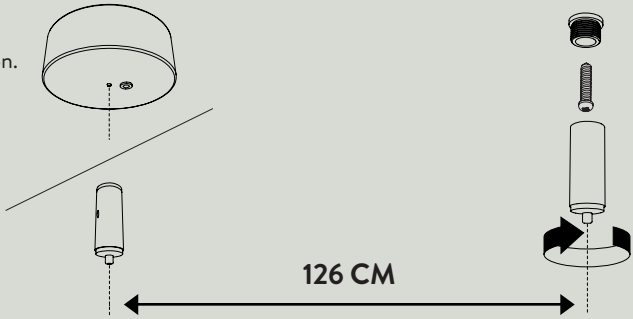


Step 12

Level the lamp by adjusting the wires through the holes in the canopy and the wire suspension.

If the wires needs to be loosened, press the small cylinder where the wires enters the canopy or the wire suspension.

Trim the excess wire using the wire cutter.

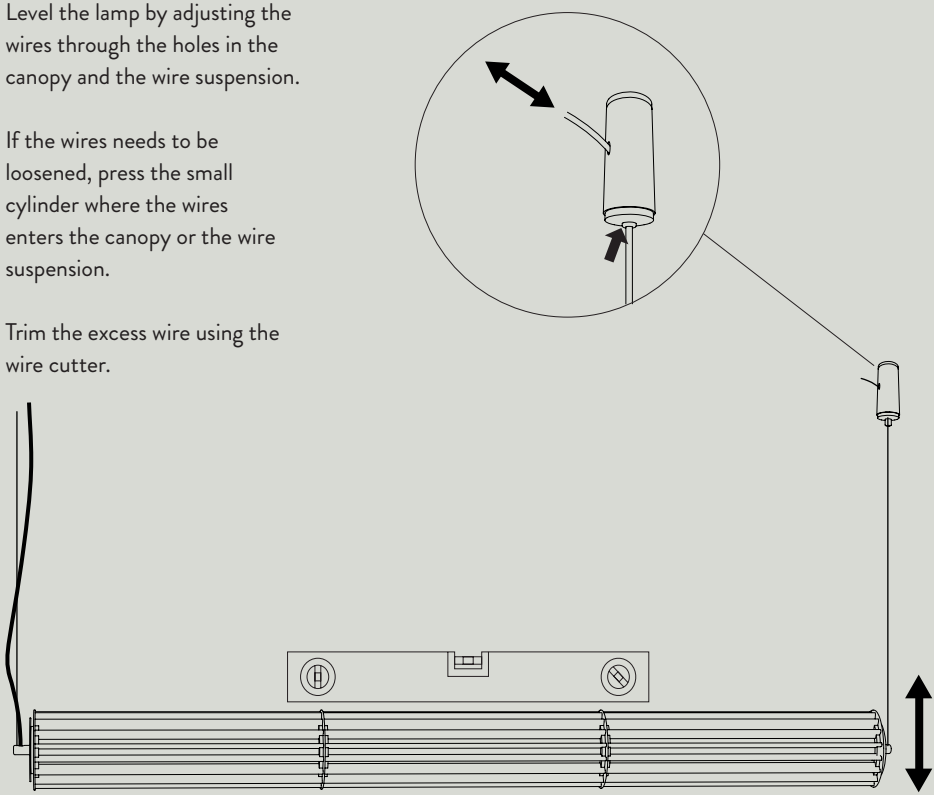

The lamp is now fully installed and the power supply can be switched on.

andtradition.com